

## Specifications

Working Height:	200 kgs. (2-Men) to 14 metres
Min. Jacked Width (to outside of Jack-feet):	3.4 m.
Max. Jacked Width (to outside of Jack-feet):	5.4 m.
Horizontal Work Reach*:	(approx) 10.5 m.
Gross Vehicle Weight:	2250 kgs.
Max. Weight on any one Outrigger†:	1400 kgs.
Loadings on Front Wheel:	705 kgs.
Loadings on Front Axle:	705 kgs.
Loadings on each Rear Wheel:	860 kgs.
Loadings on Rear Axle:	1725 kgs.

\* Note Outreach varies according to Jack-spread & Cage Loading.


† When Cage & Boom are fully extended exactly over that Outrigger with maximum safe working load.

## Dimensional data

Cage Size (2-Man):	0.6 m x 1.2 m x 1.0 m.
Stowed Width without Cage:	0.80 m.
Stowed Height:	2.05 m.
Stowed Length:	4.40 m.
Wheelbase:	2.30 m.

E & OE Constant Engineering progress makes it necessary that we reserve the right to vary specifications, equipment and pricing policy without notice.

Tyres: Heavy-duty Foam-filled  
Power: Battery/ Mains 110v.

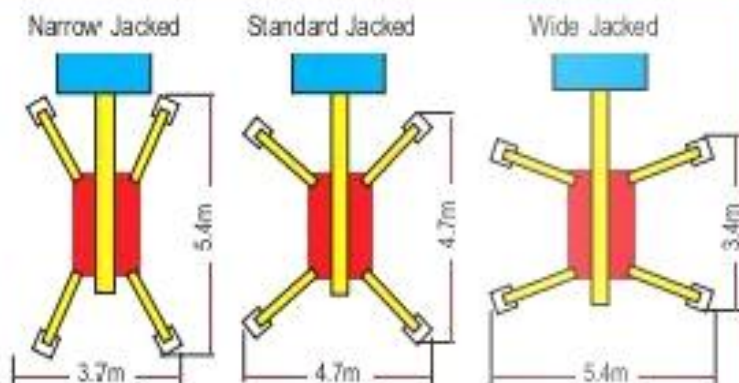

### Spider TS14 110 V Mains Power

- 14 m. (45' 11") maximum Working Height
- 10.5 m. (34' 5") maximum Outreach
- 0.80 m. (2' 7") minimum Machine-width
- 3.4 m (11' 2") minimum Jacked-width to outside of Jack-feet

- Numerous Stabiliser-leg configurations allow best use of irregular or restricted floor space.
- Stabiliser-legs can be set up on uneven ground – even on steps.



- Rubber-based Jack-feet Pads offer protection to flooring.
- Self-propelled by pedestrian control: 2-speed/inching.
- Mains power – (110vol).
- Fully Certified and recognised Training on the safe operation of these machines is available through Facelift. For more information, please telephone our Training Manager on: 01444 881166

### Spider TS14 Working Envelope

